


Silverblade

DSX20

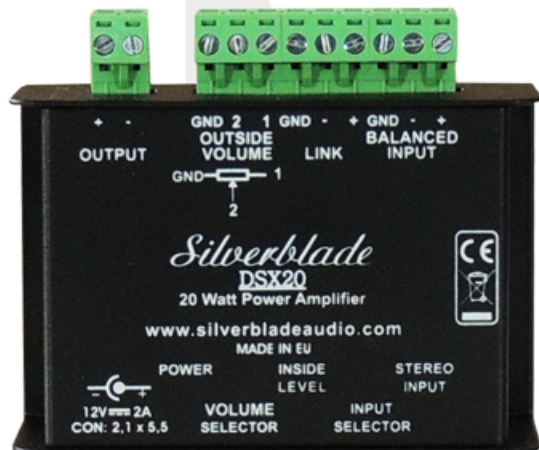

DSX220 - Mono Class-D Amplifier

Input	Balanced, Unbalanced
Input sensitivity	0 dBm
Output	10W / 8 Ohm , 20W / 4 Ohm
Frequency range	5Hz-22Khz +-1db
Signal-to-noise ratio	95 dB (22Hz-22kHz IEC)
Damping factor	>150
Power Supply	12V 2A DC adapter

Height	40 mm
Width	94 mm
Depth	64 mm
Weight	250 gr

Functions	Outside potentionmeter connection Input selector switch (balanced Euroblock / unbalanced 3,5mm jack) Volume selctor switch Balanced Link
-----------	------------------------------------------------------------------------------------------------------------------------------------------------------